


TYPICAL PAVEMENT RESTORATION DETAIL

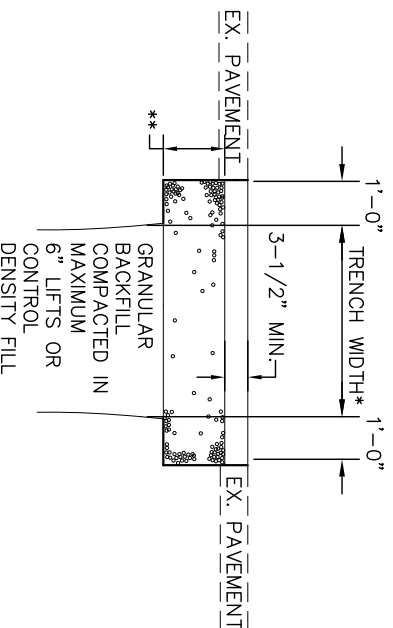

* MIN. 18" WIDTH IF ASPHALT BACKFILL IS USED IN THE REPAIR.
 ** CONCRETE OR 301 ASPHALT AGGREGATE BASE TO MATCH EXISTING CONDITION.

TYPICAL PAVEMENT RESTORATION DETAIL

TYPICAL PAVEMENT RESTORATION NOTES

MINIMUM GRAVEL PAVEMENT REPLACEMENT

2" OF ODOT #67 ON
 12" OF ODOT ITEM 304, IN LIFTS OF 3" MAXIMUM

MINIMUM ASPHALT PAVEMENT REPLACEMENT

PERMANENT PAVEMENT REPLACEMENT SHALL MATCH EXISTING PAVEMENT THICKNESS, BUT MUST BE A MINIMUM OF 3-1/2 INCHES, WHICHEVER IS GREATER. (MINIMUM PAVEMENT COMPOSITION SEE PAGE 300-2 UTILIZING APPROPRIATE STREET CLASSIFICATION).

SOIL BORINGS SHALL BE CARPED WITH A MINIMUM OF 9" OF ODOT CLASS C CONCRETE.

REVISIONS:
 10-12-09

DATE
 APPROVED:
 FEB. 2002

PAGE No.

300-19