

EMBED CONCRETE COLLAR 12" NEATLY IN UNDISTURBED SOIL ON EACH SIDE (HAND DIG). CONCRETE ODOT CLASS C REINFORCED WITH 1.5 LB. OF FIBER MESH PER CUBIC YARD

PROP. STORM SEWER

FINISHED SURFACE

POUR BOTTOM OF COLLAR NEAT IN 12" OF EMBANKMENT CLAY. FOR PIPES 18" AND OVER

SEEP COLLAR

3' + O.D. MIN.


1'-0"

1'-0"

3' + O.D. MIN.

1'-0"

COMPACTED CLAY BACKFILL. BACKFILL OPERATIONS SHALL BE PERFORMED BY HAND TAMPING

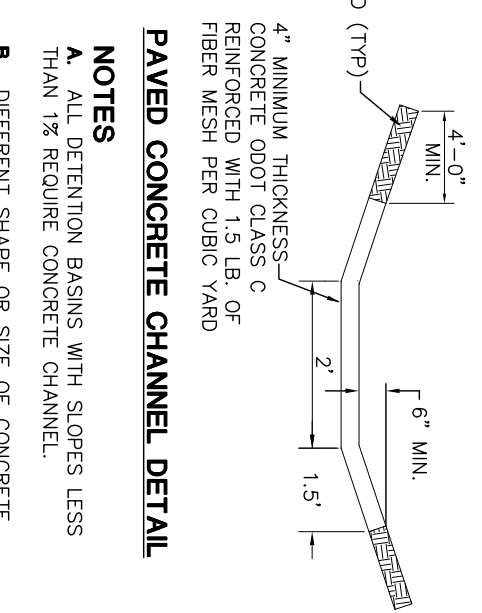

4'-0" MIN.


6" MIN.

2'

1.5'

4" MINIMUM THICKNESS CONCRETE ODOT CLASS C REINFORCED WITH 1.5 LB. OF FIBER MESH PER CUBIC YARD

PAVED CONCRETE CHANNEL DETAIL

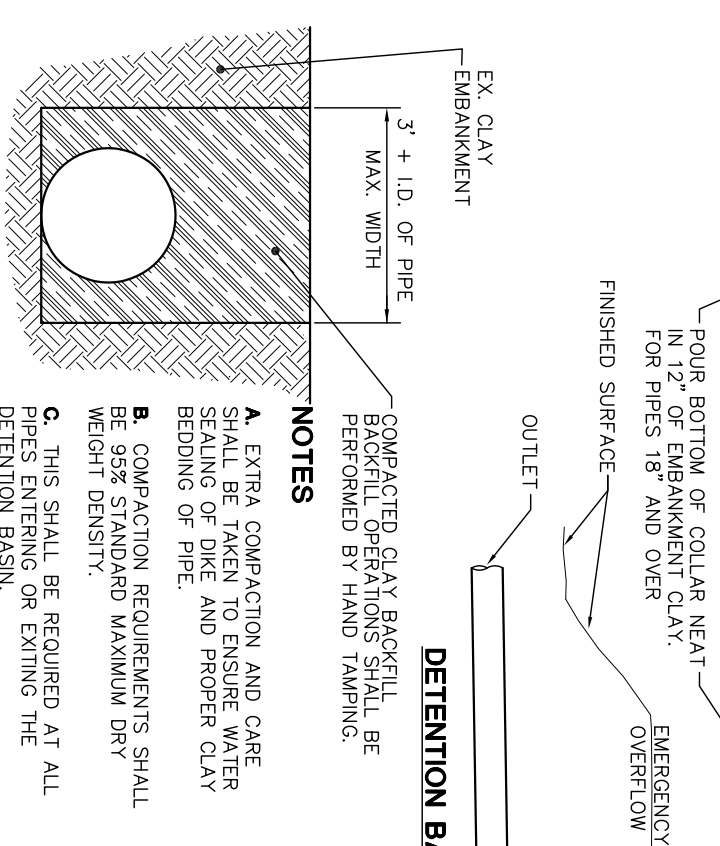

EX. CLAY EMBANKMENT

3' + I.D. OF PIPE MAX. WIDTH

COMPACTED CLAY BACKFILL. BACKFILL OPERATIONS SHALL BE PERFORMED BY HAND TAMPING.

NOTES


A. EXTRA COMPACTION AND CARE SHALL BE TAKEN TO ENSURE WATER SEALING OF DIKE AND PROPER CLAY BEDDING OF PIPE.

B. COMPACTION REQUIREMENTS SHALL BE 95% STANDARD MAXIMUM DRY WEIGHT DENSITY.

C. THIS SHALL BE REQUIRED AT ALL PIPES ENTERING OR EXITING THE DETENTION BASIN.

D. PAYMENT FOR THESE ITEMS SHALL BE INCIDENTAL TO ITEM 603.

CLAY TRENCH DETAIL THROUGH DETENTION BASIN

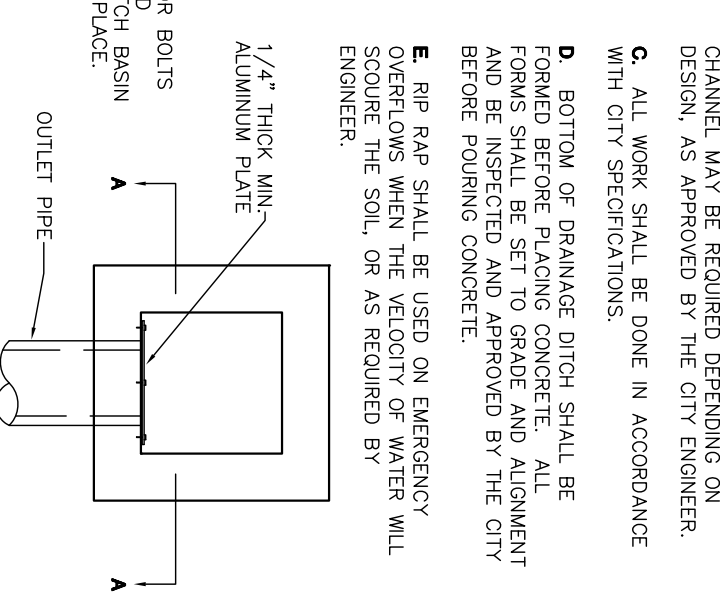

6" TO 12" ±

HEADWALL

DETENTION BASIN, BASED UPON FLOW DESIGN

DETENTION OUTLET ORIFACE

CATCH BASIN, TYPE 2-2, 2-3, OR 2-4 CATCH BASIN

1/4" THICK MIN. ALUMINUM PLATE

1/2" DIA. ANCHOR BOLTS (ALUM.) IMBEDDED MIN. 3" INTO CATCH BASIN WALL; EPOXY IN PLACE.

ORIFICE

STORM PIPE

SECTION A-A

1'-0"

1'-0"

1/4" THICK MIN. ALUMINUM PLATE

OUTLET PIPE

PLAN VIEW

DETENTION BASIN OUTLET

- NOTES**
- A. ALL DETENTION BASINS WITH SLOPES LESS THAN 1% REQUIRE CONCRETE CHANNEL.
- B. DIFFERENT SHAPE OR SIZE OF CONCRETE CHANNEL MAY BE REQUIRED DEPENDING ON DESIGN, AS APPROVED BY THE CITY ENGINEER.
- C. ALL WORK SHALL BE DONE IN ACCORDANCE WITH CITY SPECIFICATIONS.
- D. BOTTOM OF DRAINAGE DITCH SHALL BE FORMED BEFORE PLACING CONCRETE. ALL FORMS SHALL BE SET TO GRADE AND ALIGNMENT AND BE INSPECTED AND APPROVED BY THE CITY BEFORE POURING CONCRETE.
- E. RIP RAP SHALL BE USED ON EMERGENCY OVERFLOWS WHEN THE VELOCITY OF WATER WILL SCOUR THE SOIL, OR AS REQUIRED BY ENGINEER.

DETENTION/RETENTION BASIN DETAILS

REVISIONS:	DATE
APPROVED:	FEB. 2002
PAGE No.	600-10