




**ECCENTRIC CONE TOP**

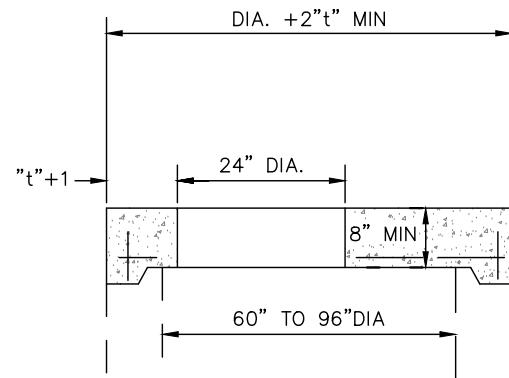

**FLAT SLAB TOP**

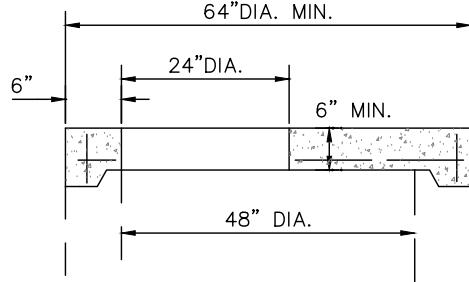


**FLAT SLAB TOP**

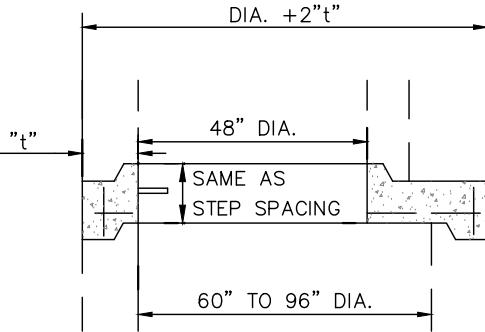

**FLAT SLAB TRANSITION**


BASE I.D.	MIN "t"	MAX. PIPE SIZE
60"	5"	36"
72"	6"	48"
84"	7"	54"
90"	7 1/2"	60"
96"	8"	60"

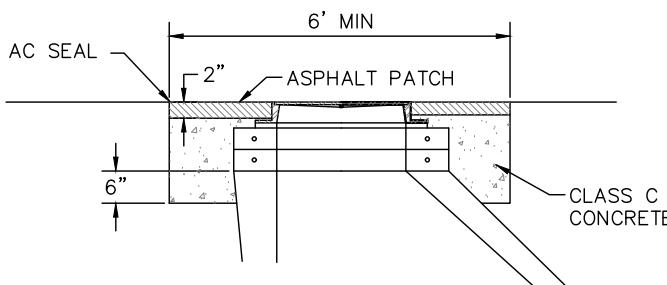

**MANHOLE REPAIR CASTING CONSTRUCTION**

**NOTES:**

1. PRECAST CONCRETE ADJUSTING RINGS- ENCASE WITH CONCRETE 6" DOWN FROM BARREL TOP AND UP TO WITHIN 2" OF SURFACE AND EXTENSIONS.
2. SET MANHOLE, PRECAST CONCRETE ADJUSTING RINGS AND CASTING THEN PAVE OVER MANHOLE. THEN DIG OUT, ENCASE COLLARS AND CASTING AS PER DETAIL WITH CONCRETE TO WITHIN 2" OF SURFACE. THE MANHOLE WILL HAVE A PATCHED RADIUS OF (2") ASPHALT.

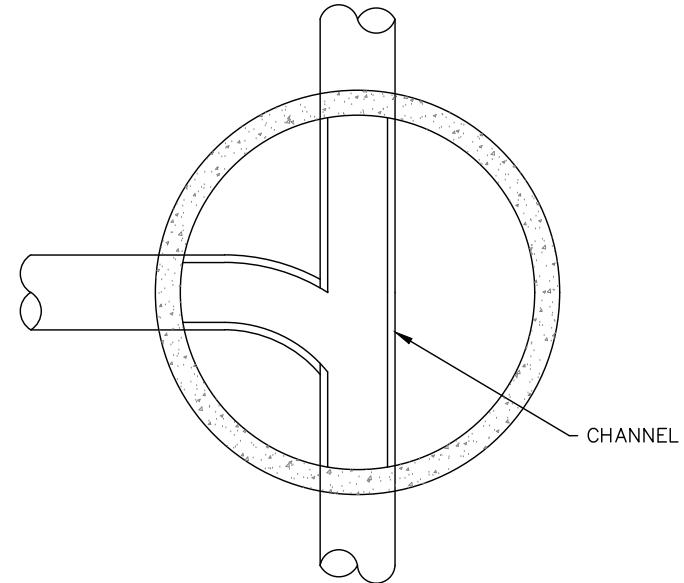

**SECTIONAL PLAN**

**NOTE**

ALL INVERTS TO BE CHANNELLED FOR OPTIMUM FLOW.



CITY OF  
SIDNEY

## TYPE 3 STORM MANHOLE DETAILS

REVISIONS: 07-22-13	DATE APPROVED: 06/03/2020
PAGE No. 600-6	