


BALE INLET FILTER

NOTES

A. THIS METHOD OF INLET PROTECTION IS APPLICABLE WHERE THE INLET DRAINS A RELATIVELY FLAT AREA (SLOPES NO GREATER THAN 5%) WHERE SHEET OR OVERLAND FLOWS (NOT EXCEEDING 0.5 CFS) ARE TYPICAL.

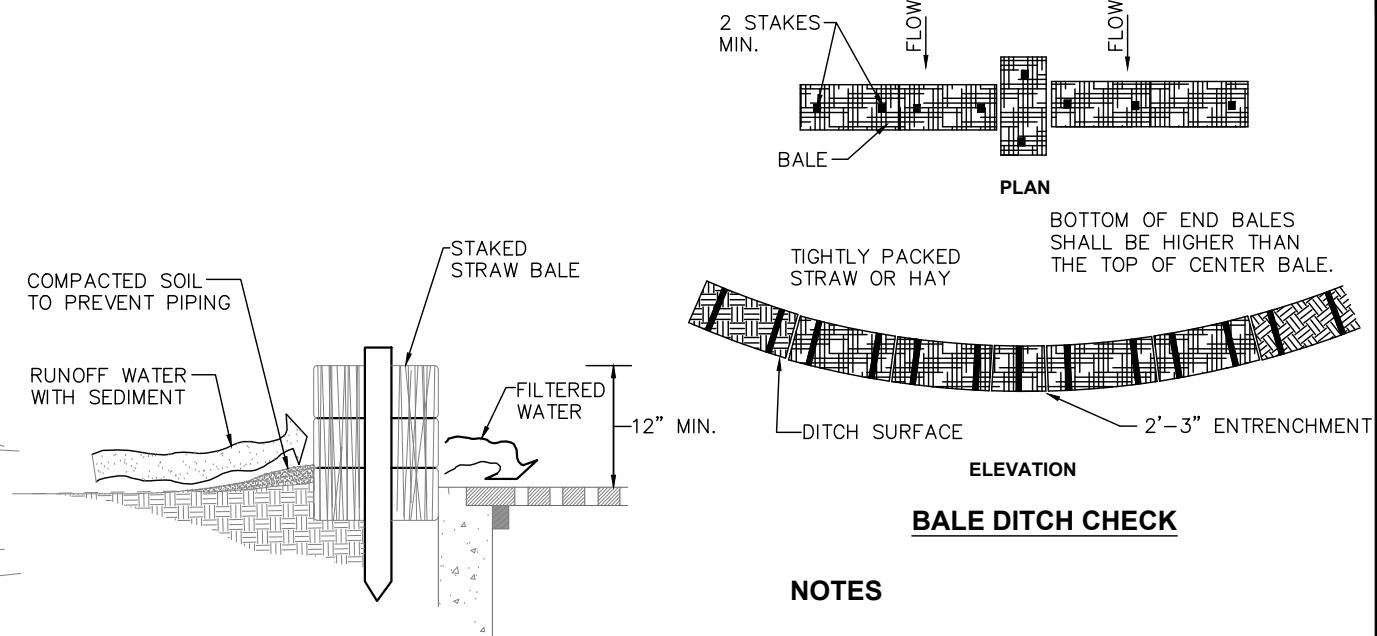

BALE DITCH CHECK

NOTES

A. PLACEMENT OF BALES SHALL BE TIGHTLY PLACED, ADJACENTLY, AND ENTRENCHED 2" AND 3" BEFORE STAKING AND A SMALL AMOUNT OF LOOSE SOIL SHALL BE LIGHTLY COMPACTED ALONG THE UPSTREAM EDGE OF THE BALES OR SEE ODOT STANDARD CONSTRUCTION DRAWING MC-11.

B. EACH BALE SHALL BE FIRMLY STAKED WITH A MINIMUM OF 2 STAKES AT LEAST 3' IN LENGTH. STAKE SHALL BE WOODEN 2" X 2", REINFORCING BARS OR FENCE POST, AS APPROVED BY THE CITY.

C. LOOSE STRAW OR HAY SHALL BE SCATTERED FOR A DISTANCE OF 10' ON THE UPSTREAM SIDE OF EACH DITCH CHECK, AND SHALL BE WEDGED BETWEEN AND UNDER STAKED BALES.



CITY OF
SIDNEY

**STRAW OR HAY BALES, TEMPORARY EROSION
CONTROL**

REVISIONS:	DATE APPROVED:
	06/03/2020
	PAGE No.
	600-13